

275000 Picofuse

276000 Picofuse

Pigtail Microfuse



Plug-in Microfuse



Subminiature 212000  
213000



1AG 301000



7AG 303000



3AG 32 V. 311000



3AG 250 V. 312000



3AG Slo-Blo 313000



## SUBMINIATURE FUSES

A must for servicing European electronic equipment. Size: 20 mm x 5 mm (.8" x .2").

### FAST ACTING (250 V.) TYPE F

L.F. No.	Amp Rating	Net Per 5	Net Per 100	
			100	500
212.100	1/10	\$1.44	\$24.00	\$19.20
212.125	1/8	1.44	24.00	19.20
212.200	2/10	1.08	18.00	14.40
212.250	1/4	1.08	18.00	14.40
212.300	3/10	1.08	18.00	14.40
212.400	4/10	1.08	18.00	14.40
212.500	5/10	1.08	18.00	14.40
212.600	6/10	1.08	18.00	14.40
212.700	7/10	1.08	18.00	14.40
212.800	8/10	1.08	18.00	14.40
212001	1	.90	15.00	12.00
2121.25	1-1/4	.90	15.00	12.00
21201.6	1-6/10	.90	15.00	12.00
212002	2	.90	15.00	12.00
21202.5	2-1/2	.90	15.00	12.00
212003	3	.90	15.00	12.00
212004	4	.90	15.00	12.00
212005	5	.90	15.00	12.00
212006	6	.90	15.00	12.00

### SLO BLO FUSES (250 V.) TYPE T

L.F. No.	Amp Rating	Net Per 5	\$1.08	\$18.00	\$14.40
213.100	1/10	\$1.08	\$18.00	\$14.40	
213.125	1/8	1.08	18.00	14.40	
213.200	2/10	1.08	18.00	14.40	
213.250	1/4	1.08	18.00	14.40	
213.300	3/10	1.08	18.00	14.40	
213.400	4/10	1.08	18.00	14.40	
213.500	5/10	1.08	18.00	14.40	
213.600	6/10	1.08	18.00	14.40	
213.700	7/10	1.08	18.00	14.40	
213.800	8/10	1.08	18.00	14.40	
213001	1	1.08	18.00	14.40	
2131.25	1-1/4	1.08	18.00	14.40	
21301.6	1-6/10	1.08	18.00	14.40	
213002	2	1.08	18.00	14.40	
21302.5	2-1/2	1.08	18.00	14.40	
213003	3	1.08	18.00	14.40	
213004	4	1.08	18.00	14.40	
213005	5	1.08	18.00	14.40	
213006	6	1.08	18.00	14.40	

### SUBMINIATURE (125 V. MAX.)

L.F. No.	Amp Rating	Net Per 5	\$1.08	\$18.00	\$14.40
271.500	1/2	\$1.08	\$18.00	\$14.40	
27101.5	1-1/2	.90	15.00	12.00	

## NEW SUBMINIATURE PICOFUSES

Unique concept in fusing for computer, micro-electronic and aero-space circuits. Designed for circuits of 125 volts or less where short-circuit currents as high as 300 amps occur. High accuracy in blowing time at 300% of rating and higher is ideal for sequential switching or in circuits requiring redundancy. Blow time 4 hours min. at 100% of rating; 5 secs. max. at 200%. Amperage printed on body; can be color-coded at additional cost. Ceramic body only 1/4" lg. x 3/16" dia.; tin-coated copper leads .025" dia. Order 275 (prefix) for axial leads 1/4" long for diode clip or in-circuit mounting; 276 for radial leads 1/4" long for use in printed circuits or receptacles.

L.F. No.	Amp Rtg.	Res., Ohms*	Net Per 5	Net Per 100	
				100	500
275.125	1/8	2.0	\$3.60	\$60.00	\$48.00
275.250	1/4	.71	36.00	600.00	480.00
275.375	3/8	.43	2.25	37.50	30.00
275.500	1/2	.26	2.25	37.50	30.00
275.750	3/4	.157	2.25	37.50	30.00
275001	1	.125	2.25	37.50	30.00
27501.5	1-1/2	.074	2.25	37.50	30.00
275002	2	.055	2.25	37.50	30.00
275003	3	.035	2.25	37.50	30.00
275004	4	.022	2.25	37.50	30.00
275005	5	.014	2.25	37.50	30.00

\*Average, cold.

## MICROFUSE SUBMINIATURE FUSES

For printed circuits and other minimum space uses. Ultra-fast blowing. Plug-in types use holder (listed on another page); pigtail types for soldering. Short circuit interrupting capacity 125 V., 10,000 amps DC. Blow Specs: 100%, 4-hour min.; 200%, 5-sec. max. Size: 1/4" dia. x 1/2" (fuse body). Plug-in, transparent cap type listed. Use prefix 272 for plug-in, metal cap; prefix 279 for pigtail, transparent cap; prefix 278 for pigtail, metal cap.

Plug-in L.F. No.	Amp Rating	Net Per 5	Net Per 100	
			100	500
273.002	1/500	\$5.13	\$85.50	\$68.40
273.005	1/200	5.13	85.50	68.40
273.010	1/100	5.13	85.50	68.40
273.015	1/64	5.13	85.50	68.40
273.031	1/32	5.13	85.50	68.40
273.050	1/20	4.29	71.50	57.20
273.062	1/18	4.29	71.50	57.20
273.100	1/10	4.29	71.50	57.20
273.125	1/8	4.29	71.50	57.20
273.200	2/10	4.29	71.50	57.20
273.250	1/4	4.29	71.50	57.20
273.300	3/10	4.29	71.50	57.20
273.400	4/10	4.29	71.50	57.20
273.500	5/10	4.29	71.50	57.20
273.600	6/10	4.29	71.50	57.20
273.700	7/10	4.29	71.50	57.20
273.750	3/4	4.29	71.50	57.20
273.800	8/10	4.29	71.50	57.20
273001	1	4.29	71.50	57.20
27301.5	1-1/2	4.29	71.50	57.20
273002	2	4.29	71.50	57.20
273003	3	4.29	71.50	57.20
273004	4	4.29	71.50	57.20
273005	5	4.29	71.50	57.20

## 1AG FUSES (32 V. OR LESS)

Blow Time: 110%, 4-hour min.; 135%, 1 hour max.; 200%, 20-sec. max. Length 3/8", dia. 1/4".

L.F. No.	Amp Rating	Net Per 5	Net Per 100	
			100	500
301001	1	\$0.28	\$4.70	\$3.76
301002	2	.28	4.70	3.76
30102.5	2-1/2	.28	4.70	3.76
301003	3	.25	4.20	3.36
301005	5	.21	3.50	2.80
301006	6	.21	3.50	2.80
30107.5	7-1/2	.21	3.50	2.80
301010	10	.21	3.50	2.80
301015	15	.21	3.50	2.80
301020	20	.21	3.50	2.80
301025	25	.21	3.50	2.80
301030	30	.21	3.50	2.80

## 7AG FUSES (32 V. OR LESS)

Blow Time: 110%, 4-hour min.; 135%, 1 hour max.; 200%, 20-sec. max. Length 3/8", dia. 1/4".

L.F. No.	Amp Rating	Net Per 5	Net Per 100	
			100	500
303001	1	\$0.28	\$4.70	\$3.76
303002	2	.18	3.00	2.40
303004	4	.18	3.00	2.40
303006	6	.18	3.00	2.40
303015	15	.21	3.50	2.80
303020	20	.21	3.50	2.80
303030	30	.21	3.50	2.80

## 3AG FUSES (32 V. OR LESS)

Blow Time: 110%, 4-hour min.; 135%, 1 hour max.; 200%, 20-sec. max. Length 1 1/4", dia. 1/4".

L.F. No.	Amp Rating	Net Per 5	Net Per 100	
			100	500
311004	4	\$0.25	\$4.20	\$3.36
311005	5	.18	3.00	2.40
311006	6	.18	3.00	2.40
31107.5	7-1/2	.18	3.00	2.40
311010	10	.18	3.00	2.40
311015	15	.18	3.00	2.40
311025	25	.21	3.50	2.80
311030	30	.21	3.50	2.80
311035	35	.25	4.20	3.36

## 3AG FUSES (250 V. OR LESS)

Blow Time: 110%, 4-hour min.; 135%, 1 hour max.; 200%, 10-sec. max. Length 1 1/4", dia. 1/4". U/L Approved.

L.F. No.	Amp Rating	Net Per 5	Net Per 100	
			100	500
312.010	1/100	\$1.74	\$29.00	\$23.20
312.031	1/32	1.53	25.50	20.40
312.062	1/16	.69	11.50	9.20
312.100	1/10	.69	11.50	9.20
312.125	1/8	.69	11.50	9.20
312.150	15/100	.69	11.50	9.20
312.175	.175	.69	11.50	9.20
312.187	3/16	.69	11.50	9.20
312.200	2/10	.69	11.50	9.20
312.250	1/4	.45	7.50	6.00
312.300	3/10	.45	7.50	6.00
312.375	3/8	.45	7.50	6.00
312.500	1/2	.45	7.50	6.00
312.600	6/10	.45	7.50	6.00
312.750	3/4	.45	7.50	6.00
312001	1	.28	4.70	3.76
3121.25	1-1/4	.28	4.70	3.76
31201.5	1-1/2	.28	4.70	3.76
31201.6	1-6/10	.28	4.70	3.76
312002	2	.28	4.70	3.76
31202.5	2-1/2	.25	4.20	3.36
312003	3	.25	4.20	3.36
312004	4	.36	6.00	4.80
312005	5	.36	6.00	4.80
312006	6	.36	6.00	4.80
312008	8	.54	9.00	7.20

## 3AG SLO BLO FUSES

Blow Time: 110%, 4-hour min.; 135%, 1 hour max.; 200%, 5-sec. min. Length 1 1/4", dia. 1/4". U/L Approved thru 5 amps.

L.F. No.	Amp Rating	Net Per 5	Net Per 100	
			100	500
313.010	1/100	\$1.29	\$21.50	\$17.20
313.031	1/32	1.29	21.50	17.20
313.062	1/16	.96	16.00	12.80
313.100	1/10	.96	16.00	12.80
313.125	1/8	.96	16.00	12.80
313.150	15/100	.96	16.00	12.80
313.175	.175	.96	16.00	12.80
313.187	3/16	.96	16.00	12.80
313.200	2/10	.96	16.00	12.80
313.250	1/4	.96	16.00	12.80
313.300	3/10	.96	16.00	12.80
313.375	3/8	.96	16.00	12.80
313.400	4/10	.96	16.00	12.80
313.500	5/10	.96	16.00	12.80
313.600	6/10	.96	16.00	12.80
313.700	7/10	.96	16.00	12.80
313.750	3/4	.96	16.00	12.80
313.800	8/10	.96	16.00	12.80
313001	1	.96	16.00	12.80
31301.2	1-2/10	.96	16.00	12.80
3131.25	1-1/4	.90	15.00	12.00
31301.5	1-1/2	.90	15.00	12.00
31301.6	1-6/10	.90	15.00	12.00
313002	2	.90	15.00	12.00
31302.5	2-1/2	.69	11.50	9.20
313003	2-8/10	.69	11.50	9.20
313003	3	.69	11.50	9.20
31303.2	3-2/10	.69	11.50	9.20
313004	4	.69	11.50	9.20
313005	5	.69	11.50	9.20
3136.25	6-1/4	.69	11.50	9.20
313007	7	.69	11.5	

# LITTELFUSE Quality Fuses

## 3AG SLO BLO PIGTAIL FUSES (125 V.)

Blow Time: 110%, 4-hour min.; 135%, 1 hour max.; 200%, 5-sec. min. Length 1 1/4", dia. 1/4", 1 1/2" pigtails. U/L Approved thru 3.2 amps.

L.F. No.	Amp Rating	Net Per 5	Net Per 100	
			100	500
315.010	1/100	\$1.59	\$26.50	\$21.20
315.031	1/32	1.59	26.50	21.20
315.062	1/16	1.17	19.50	15.60
315.100	1/10	1.17	19.50	15.60
315.125	1/8	1.17	19.50	15.60
315.150	.15	1.17	19.50	15.60
315.175	.175	1.17	19.50	15.60
315.187	3/16	1.17	19.50	15.60
315.200	2/10	1.17	19.50	15.60
315.250	1/4	1.17	19.50	15.60
315.300	3/10	1.17	19.50	15.60
315.375	3/8	1.17	19.50	15.60
315.400	4/10	1.17	19.50	15.60
315.500	1/2	1.17	19.50	15.60
315.600	6/10	1.17	19.50	15.60
315.700	7/10	1.17	19.50	15.60
315.750	3/4	1.17	19.50	15.60
315.800	8/10	1.17	19.50	15.60
315001		1.17	19.50	15.60
31501.2	1-2/10	1.11	18.50	14.80
3151.25	1-1/4	1.11	18.50	14.80
31501.5	1-1/2	1.11	18.50	14.80
31501.6	1-6/10	1.11	18.50	14.80
315002	2	1.11	18.50	14.80
31502.5	2-1/2	.96	16.00	12.80
31502.8	2-8/10	.96	16.00	12.80
315003	3	.96	16.00	12.80
31503.2	3-2/10	.96	16.00	12.80
315004	4	.96	16.00	12.80
315005	5	.96	16.00	12.80

## 3AG PIGTAIL FUSES (250 V.)

Blow Time: 110%, 4-hour min.; 135%, 1 hour max.; 200%, 10-sec. max. Length 1 1/4", dia. 1/4", 1 1/2" pigtails.

L.F. No.	Amp Rating	Net Per 5	Net Per 100	
			100	500
318.010	1/100	\$1.20	\$20.00	\$16.00
318.062	1/16	1.20	20.00	16.00
318.125	1/8	.90	15.00	12.00
318.150	15/100	.90	15.00	12.00
318.187	3/16	.90	15.00	12.00
318.200	2/10	.90	15.00	12.00
318.250	1/4	.69	11.50	9.20
318.375	3/8	.69	11.50	9.20
318.500	1/2	.69	11.50	9.20
318.750	3/4	.69	11.50	9.20
318001	1	.54	9.00	7.20
31801.5	1-1/2	.54	9.00	7.20
318002	2	.54	9.00	7.20
31802.5	2-1/2	.54	9.00	7.20
318003	3	.54	9.00	7.20
318004	4	.57	9.50	7.60
318005	5	.57	9.50	7.60
318006	6	.57	9.50	7.60
318008	8	.69	11.50	9.20

## 3AG INDICATING FUSES (125 V.)

Blow Time: 110%, 4-hour min.; 135%, 1 hour max. Length 1 1/4", dia. 1/4".

L.F. No.	Amp Rating	Net Per 5	Net Per 100	
			100	500
334.750	3/4	\$2.10	\$35.00	\$28.00
334001	1	1.59	26.50	21.20
33401.5	1-1/2	1.59	26.50	21.20
334002	2	1.59	26.50	21.20
334003	3	1.59	26.50	21.20
334004	4	1.59	26.50	21.20
334005	5	1.59	26.50	21.20
334006	6	2.22	37.00	29.60
334008	8	2.22	37.00	29.60
334010	10	2.22	37.00	29.60
334012	12	2.22	37.00	29.60
334015	15	2.22	37.00	29.60
334020	20	2.22	37.00	29.60

## 3AB TINY MIGHTY (250 V. OR LESS)

Blow Time: 110%, 4-hour min.; 135%, 1 hour max.; 200%, 30-sec. max. Length 1 1/4", dia. 1/4", U/L Approved thru 15 amps.

L.F. No.	Amp Rating	Net Per 5	Net Per 100	
			100	500
314.125	1/8	\$0.63	\$10.50	\$8.40
314.250	1/4	.63	10.50	8.40
314.375	3/8	.63	10.50	8.40
314.500	1/2	.63	10.50	8.40
314.750	3/4	.63	10.50	8.40
314001	1	.60	10.00	8.00
314002	2	.60	10.00	8.00
314003	3	.60	10.00	8.00
314005	5	.57	9.50	7.60
314006	6	.57	9.50	7.60
314007	7	.57	9.50	7.60
314008	8	.57	9.50	7.60
314010	10	.57	9.50	7.60
314012	12	.60	10.00	8.00
314015	15	.60	10.00	8.00
314020	20	.60	10.00	8.00
314025	25	.72	12.00	9.60
314030	30	.72	12.00	9.60

## LIMITED CURRENT (250 V.) TYPE C

Blow Time: 110%, 4-hour min.; 135%, 1 hour max.; 200%, 10-sec. max. Prices for applicable fuse holders available upon request.

L.F. No.	Amp Rating	Net Per 5	Net Per 100	
			100	500
332.031	1/32	\$1.47	\$24.50	\$19.60
332.062	1/16	.96	16.00	12.80
332.125	1/8	.72	12.00	9.60
332.187	3/16	.72	12.00	9.60
332.250	1/4	.57	9.50	7.60
332.300	3/10	.57	9.50	7.60
332.375	3/8	.57	9.50	7.60
332.400	4/10	.57	9.50	7.60
332.500	1/2	.57	9.50	7.60
332.700	7/10	.57	9.50	7.60
332001	1	.33	5.50	4.40
3321.25	1-1/4	.33	5.50	4.40
33201.5	1-1/2	.33	5.50	4.40
3321.75	1-3/4	.33	5.50	4.40
332002	2	.33	5.50	4.40
33202.5	2-1/2	.33	5.50	4.40
332003	3	.33	5.50	4.40
33203.5	3-1/2	.42	7.00	5.60
332004	4	.42	7.00	5.60
332005	5	.42	7.00	5.60
332006	6	.42	7.00	5.60
332007	7*	.42	7.00	5.60
332008	8*	.60	10.00	8.00
332010	10*	.63	10.50	8.40

\*125 volt.

## LC SLO BLO (125 V.) TYPE N

Blow Time: 110%, 4-hour min.; 135%, 1 hour max.; 200%, 5-sec. max. Prices for applicable fuse holders upon request.

L.F. No.	Amp Rating	Net Per 5	Net Per 100	
			100	500
333.010	1/100	\$1.38	\$23.00	\$18.40
333.021	1/32	1.38	23.00	18.40
333.062	1/16	.99	16.50	13.20
333.100	1/10	.99	16.50	13.20
333.150	15/100	.99	16.50	13.20
333.200	2/10	.99	16.50	13.20
333.250	1/4	.99	16.50	13.20
333.300	3/10	.99	16.50	13.20
333.400	4/10	.99	16.50	13.20
333.500	1/2	.99	16.50	13.20
333.600	6/10	.99	16.50	13.20
333.700	7/10	.99	16.50	13.20
333.750	3/4	.99	16.50	13.20
333.800	8/10	.99	16.50	13.20
333001	1	.99	16.50	13.20
3331.25	1-1/4	.90	15.00	12.00
33301.6	1-6/10	.90	15.00	12.00
3331.75	1-3/4	.90	15.00	12.00
333002	2	.84	14.00	11.20
33302.5	2-1/2	.84	14.00	11.20
33302.8	2-8/10	.84	14.00	11.20
33303.2	3-2/10	.84	14.00	11.20
333003	3	.84	14.00	11.20
33303.5	3-1/2	.84	14.00	11.20
333004	4	.84	14.00	11.20
333005	5	.84	14.00	11.20
3336.25	6-1/4*	.84	14.00	11.20
333007	7*	.84	14.00	11.20

\*32 volt.

## SFE AUTO FUSES (32 V. OR LESS)


Blow Time: 110%, 4-hour min.; 135%, 0-1 hour; 160%, 20 amps or less 0-15 sec., 30 amps or less 0-30 sec. Dia. 1/4".

L.F. No.	Amp Rating	Lgth. In.	Net Per 5	Net Per 100	
				100	500
307004	4	3/8	\$0.21	\$3.50	\$2.80
307006	6	3/8	.21	3.50	2.80
30707.5	7-1/2	1 1/2	.18	3.00	2.40
307009	9	3/8	.18	3.00	2.40
307014	14	1 1/2	.16	2.65	2.12
307020	20	1 1/2	.16	2.65	2.12
307030	30	1 1/2	.21	3.50	2.80

## 8AG FUSES

Blow Time: 110%, 4-hour min.; 135%, 1 hour max.; 200%, 10-sec. max. Length 1", dia. 1/4", U/L Approved.

L.F. No.	Amp Rating	Net Per 5	Net Per 100	
			100	500
362.125	1/8	\$0.69	\$11.50	\$9.20
362.250	1/4	.45	7.50	6.00
362.375	3/8	.45	7.50	6.00
362.500	1/2	.45	7.50	6.00
362.750	3/4	.45	7.50	6.00
362001	1	.28	4.70	3.76
36201.5	1-1/2	.28	4.70	3.76
362002	2	.28	4.70	3.76
362003	3	.28	4.70	3.76
362005	5	.18	3.00	2.40
362006	6	.18	3.00	2.40
362008	8	.18	3.00	2.40
362010	10	.18	3.00	2.40
362012	12	.18	3.00	2.40
362015	15	.18	3.00	2.40
362020	20	.18	3.00	2.40
362025	25	.21	3.50	2.80
362030	30	.21	3.50	2.80



3AG Slo-Blo Pigtail 315000




3AG Pigtail 318000




3AG Pin-Indicating 334000



3AB Steatite 314000




Limited Current Type C 332000




Limited Current Type N 333000




SFE 7 1/2 & 9 30707.5 & 307009



SFE 14 307014




SFE 20 307020



SFE 30 307030



8AG Instrument 361000




8AG U/L 362000

## 8AG INSTRUMENT FUSES

Blow Time: 100%, 4-hour min.; 200%, 5-sec. max. Length 1", dia. 1/4".

L.F. No.	Amp Rating	Net Per 5	Net Per 100	
			100	500
361.002	1/500	\$4.68	\$78.00	\$62.40
361.005	1/200	1.95	32.50	26.00
361.010	1/100	1.74	29.00	23.20
361.031	1/32	1.53	25.50	20.40
361.062	1/16	.96	16.00	12.80
361.100	1/10	.69	11.50	9.20
361.125	1/8	.69	11.50	9.20

# LITTELFUSE Fuses, Fuse Puller

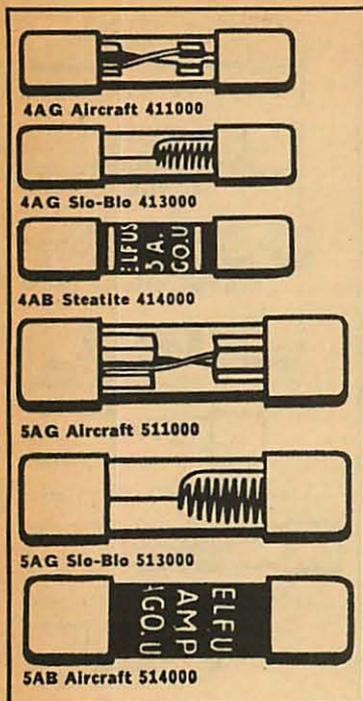

## 4AG QUICK-ACTING FUSES (250 V. OR LESS)

Blow Time: 110%, 4-hour min.; 135%, 1 hour max.; 200%, 10-sec. max. Length  $1\frac{1}{2}$ " dia.  $\frac{1}{8}$ ".

L.F. No.	Amp Rating	Net Per 5	Net Per 100	
			100	500
412.062	1/16	\$1.47	\$24.50	\$19.60
412.125	1/8	1.02	17.00	13.60
412.150	15/100	1.02	17.00	13.60
412.250	1/4	.51	8.50	6.80
412.500	1/2	.51	8.50	6.80
412001	1	.45	7.50	6.00
41201.5	1-1/2	.45	7.50	6.00
412002	2	.45	7.50	6.00
41202.5	2-1/2	.45	7.50	6.00
412003	3	.45	7.50	6.00
412005	5	.39	6.50	5.20
412008	8*	.39	6.50	5.20

\*125 volts.

## 4AG SLO BLO AIRCRAFT FUSES (250 V. OR LESS)

Blow Time: 110%, 4-hour min.; 135%, 1 hour max.; 200%, 5-sec. min. Length  $1\frac{1}{2}$ " dia.  $\frac{1}{8}$ ".

L.F. No.	Amp Rating	Net Per 5	Net Per 100	
			100	500
413.062	1/16	\$1.26	\$21.00	\$16.80
413.100	1/10	1.26	21.00	16.80
413.125	1/8	1.26	21.00	16.80
413.150	15/100	1.26	21.00	16.80
413.200	2/10	1.26	21.00	16.80
413.250	1/4	1.26	21.00	16.80
413.300	3/10	1.26	21.00	16.80
413.400	4/10	1.26	21.00	16.80
413.500	1/2	1.26	21.00	16.80
413.600	6/10	1.26	21.00	16.80
413.750	3/4	1.26	21.00	16.80
413.800	8/10	1.26	21.00	16.80
413001	1	1.26	21.00	16.80
4131.25	1-1/4	1.26	21.00	16.80
41301.5	1-1/2	1.26	21.00	16.80
41301.6	1-6/10	1.26	21.00	16.80
413002	2	1.26	21.00	16.80
41302.5	2-1/2	.96	16.00	12.80
413003	3	.96	16.00	12.80
41303.2	3-2/10	.96	16.00	12.80
413004	4	.96	16.00	12.80
413005	5	.96	16.00	12.80
4136.25	6-1/4	.96	16.00	12.80
413008	8	.96	16.00	12.80
413010	10	.96	16.00	12.80
413015	15	.96	16.00	12.80
413020	20	.96	16.00	12.80
413025	25	.96	16.00	12.80
413030	30	.96	16.00	12.80

## 4AG AIRCRAFT FUSES

Blow Time: 110%, 4-hour min.; 135%, 1 hour max.; 200%, 10-sec. max. Length  $1\frac{1}{2}$ " dia.  $\frac{1}{8}$ ".

L.F. No.	Amp Rating	Net Per 5	Net Per 100	
			100	500
411010	10	\$0.39	\$6.50	\$5.20
411015	15	.39	6.50	5.20
411020	20	.39	6.50	5.20
411025	25	.39	6.50	5.20
411030	30	.39	6.50	5.20
411035	35	.45	7.50	6.00
411040	40	.45	7.50	6.00

## 4AB FUSES (STEATITE)

Blow Time: 110%, 4-hour min.; 135%, 1 hour max.; 200%, 30-sec. max. Length  $1\frac{1}{2}$ " dia.  $\frac{1}{8}$ ".

L.F. No.	Amp Rating	Net Per 5	Net Per 100	
			100	500
414001	1	\$0.93	\$15.50	\$12.40
414002	2	.93	15.50	12.40
414003	3	.93	15.50	12.40
414005	5	.87	14.50	11.60
414006	6	.87	14.50	11.60
414008	8	.87	14.50	11.60
414010	10	.87	14.50	11.60
414015	15	.87	14.50	11.60
414020	20	.87	14.50	11.60
414025	25	.87	14.50	11.60
414030	30	.87	14.50	11.60
414035	35	.93	15.50	12.40
414040	40	.93	15.50	12.40

## 5AG AIRCRAFT FUSES

Blow Time: 110%, 4-hour min.; 135%, 1 hour max.; 200%, 20-sec. max. Length  $1\frac{1}{2}$ " dia.  $\frac{1}{8}$ ".

L.F. No.	Amp Rating	Net Per 5	Net Per 100	
			100	500
511010	10	\$0.54	\$9.00	\$7.20
511015	15	.54	9.00	7.20
511020	20	.54	9.00	7.20
511025	25	.54	9.00	7.20
511030	30	.54	9.00	7.20
511035	35	.57	9.50	7.60
511040	40	.57	9.50	7.60
511050	50	.57	9.50	7.60
511060	60	.57	9.50	7.60

## 5AG QUICK-ACTING FUSES (250 V. OR LESS)

Blow Time: 110%, 4-hour min.; 135%, 1 hour max.; 200%, 10-sec. max. Length  $1\frac{1}{2}$ " dia.  $\frac{1}{8}$ ".

L.F. No.	Amp Rating	Net Per 5	Net Per 100	
			100	500
512001	1	\$0.57	\$9.50	\$7.60
512002	2	.57	9.50	7.60
512003	3	.57	9.50	7.60
512004	4	.57	9.50	7.60
512005	5	.54	9.00	7.20
512008	8*	.54	9.00	7.20

\*125 volts.

## 5AG SLO BLO FUSES (250 V. OR LESS)

Blow Time: 110%, 4-hour min.; 135%, 1 hour max.; 200%, 5-sec. min. Length  $1\frac{1}{2}$ " dia.  $\frac{1}{8}$ ".

L.F. No.	Amp Rating	Net Per 5	Net Per 100	
			100	500
513.500	1/2	\$1.59	\$26.50	\$21.20
513001	1	1.59	26.50	21.20
513002	2	1.59	26.50	21.20
513003	3	1.26	21.00	16.80
513005	5	1.26	21.00	16.80
513010	10	1.26	21.00	16.80
513015	15	1.26	21.00	16.80
513020	20	1.26	21.00	16.80
513025	25	1.41	23.50	18.80
513030	30	1.41	23.50	18.80

## 5AB AIRCRAFT FUSES

Blow Time: 110%, 4-hour min.; 135%, 1 hour max.; 200%, 30-sec. max. Length  $1\frac{1}{2}$ " dia.  $\frac{1}{8}$ ".

L.F. No.	Amp Rating	Net Per 5	Net Per 100	
			100	500
514001	1	\$1.05	\$17.50	\$14.00
514002	2	1.05	17.50	14.00
514003	3	1.05	17.50	14.00
51403.5	3-1/2	1.05	17.50	14.00
514005	5	.99	16.50	13.20
514006	6	.99	16.50	13.20
514600.25	6-1/4	.99	16.50	13.20
514007	7	.99	16.50	13.20
514008	8	.99	16.50	13.20
514010	10	.99	16.50	13.20
514015	15	.99	16.50	13.20
514020	20	.99	16.50	13.20
514025	25	.99	16.50	13.20
514030	30	.99	16.50	13.20
514035	35	1.05	17.50	14.00
514040	40	1.05	17.50	14.00

## HIGH VOLTAGE FUSES

Designed for use in aircraft radio equipment, transmitting equipment, X-ray apparatus, high voltage rectifiers, etc., for circuits up to 20 kW DC or 30 KVA AC. Fuses are fiber enclosed with cadmium plated end caps. Two principles of arc suppression are employed: (1) Multi-break fuse wire which blows at each half inch of its length; (2) Ceramic baffles break the arc into several parts and quench it. Blow Time: 110%, 4-hour min.; 135%, 0-1 hour; 200% 0-2 minutes.

### 1000-VOLT (3" x 1 1/2")

L.F. No.	Amp Rating	Net Each	Net Per 100	
			100	500
621.375	3/8	\$0.29	\$24.00	\$19.20
621.500	1/2	.29	24.00	19.20
621.750	3/4	.29	24.00	19.20
621001	1	.29	24.00	19.20
62101.5	1-1/2	.29	24.00	19.20
621002	2	.29	24.00	19.20

### 2500-VOLT (4 1/2" x 1 1/2")

L.F. No.	Amp Rating	Net Each	Net Per 100	
			100	500
622.500	1/2	\$0.38	\$31.50	\$25.20
622.750	3/4	.38	31.50	25.20
622001	1	.38	31.50	25.20
62201.5	1-1/2	.38	31.50	25.20
622002	2	.38	31.50	25.20

### 3000-VOLT (5 1/2" x 1 1/2")

L.F. No.	Amp Rating	Net Each	Net Per 100	
			100	500
623.500	1/2	\$0.54	\$45.00	\$36.00
623.750	3/4	.54	45.00	36.00
623001	1	.54	45.00	36.00
62301.5	1-1/2	.54	45.00	36.00
623002	2	.54	45.00	36.00

### 1000-VOLT (3" x 1 1/2")

L.F. No.	Amp Rating	Net Each	Net Per 100	
			100	500
701.062	1/16	\$0.65	\$54.50	\$43.60
701.125	1/8	.65	54.50	43.60
701.250	1/4	.65	54.50	43.60
701.375	3/8	.65	54.50	43.60
701.500	1/2	.65	54.50	43.60
701.750	3/4	.65	54.50	43.60
701001	1	.65	54.50	43.60
70101.5	1-1/2	.65	54.50	43.60
701002	2	.65	54.50	43.60

### 5000-VOLT (5" x 1 1/2")


L.F. No.	Amp Rating	Net Each	Net Per 100	
			100	500
702.062	1/16	\$0.70	\$58.50	\$46.80
702.125	1/8	.70	58.50	46.80
702.250	1/4	.70	58.50	46.80
702.375	3/8	.70	58.50	46.80
702.500	1/2	.70	58.50	46.80
702.750	3/4	.70	58.50	46.80
702001	1	.70	58.50	46.80
70201.5	1-1/2	.70	58.50	46.80
702002	2	.70	58.50	46.80
70202.5	2-1/2	.70	58.50	46.80
702003	3	.70	58.50	46.80

### 10,000-VOLT (10" x 1 1/2")

L.F. No.	Amp Rating	Net Each	Net Per 100	
			100	500
703.062	1/16	\$1.34	\$111.50	\$89.20
703.125	1/8	1.34	111.50	89.20
703.250	1/4	1.34	111.50	89.20
703.175	3/8	1.34	111.50	89.20
703.500	1/2	1.34	111.50	89.20
703.750	3/4	1.34	111.50	89.20
703001	1	1.34	111.50	89.20
70301.5	1-1/2	1.34	111.50	89.20
703002	2	1.34	111.50	89.20
703003	3	1.34	111.50	89.20

## FUSE PULLER AND ASSORTMENT

Handy tool provides safe, easy method of extracting any blown fuse. Hooks around fuse permitting easy jerk-out. Available singly (097006) or in card-mounted assortment of 20 pullers, pressure sensitively attached on a card (094066).

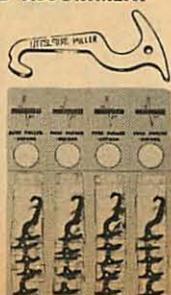

L.F. No.	Net Ea., Lots	
	1-100	500Up
097006	\$0.13	\$0.10
094066	3.80	3.04

# LITTELFUSE

## CIRCUIT BREAKERS, MOUNTINGS AND CLIPS

### MOUNTINGS FOR SARKES TARZIAN AND INTERNATIONAL RECTIFIERS

L.F. No.	Description	Net Each, Lots of 5	Net Per 100	
			100	500
099062	Single pole, 3/8" base	\$0.144	\$12.00	\$ 9.60
099063	Double pole, 1/2" base	.29	24.50	19.60
099065	Double pole, 1/4" base	.19	16.00	12.80
099065-3	1/4" Bakelite insulator	.015	1.25	1.00
099067	Single pole 1/4" base	.084	7.00	5.60
099067-3	1/4" Bakelite insulator	.009	.75	.60

### STANDARD FUSE CLIPS (PHOSPHOR BRONZE, NICKEL PLATED)

L.F. No.	Fuse Adaptation	Type	Net Each, Lots of 5	Net Per 100	
				100	500
101001	SFE, 3AG, 8AG, 3AB	Ear	\$0.0204	\$ 1.70	\$ 1.36
101002	SFE, 3AG, 8AG, 3AB	Earless	.0204	1.70	1.36
101003*	SFE, 3AG, 8AG, 3AB	Lug	.0286	2.38	1.88
103001	4AG, 4AB	Ear	.0368	3.06	2.36
104002	4AG, 4AB	Earless	.0368	3.06	2.36
105001	5AG, 5AB	Ear	.045	3.75	2.90
105002	5AG	Earless	.045	3.75	2.90
107001	5/16" dia.	Ear	.072	6.00	4.80
107002	5/16" dia.	Earless	.072	6.00	4.80
109001	13/16" dia.	Ear	.192	16.00	12.80
109002	13/16" dia.	Earless	.192	16.00	12.80

\*Unplated, bright dip.

### STANDARD FUSE CLIPS (BERYLLIUM COPPER, SILVER PLATED)

L.F. No.	Description	Type	Net Each, Lots of 5	Net Per 100	
				100	500
121001	SFE, 3AG, 8AG, 3AB	Ear	\$0.045	\$ 3.75	\$ 3.00
121002	SFE, 3AG, 8AG, 3AB	Earless	.045	3.75	3.00
121004	SFE, 3AG, 8AG, 3AB	Lug	.063	5.25	4.10
123001	4AG, 4AB	Ear	.072	6.00	4.80
123002	4AG, 4AB	Earless	.072	6.00	4.80
125001	5AG, hi-volt	Ear	.108	9.00	7.20
125002	5AG, hi-volt	Earless	.108	9.00	7.20
127001	5/16" dia.	Ear	.222	18.50	14.80
127002	5/16" dia.	Earless	.222	18.50	14.80
129001	13/16" dia.	Ear	.522	43.50	34.80
129002	13/16" dia.	Earless	.522	43.50	34.80

### 3AG MOUNTINGS

L.F. No.	Description	Net Each, Lots of 5	Net Per 100	
			100	500
351009	Hinged can cover, 2 pole	\$1.104	\$92.00	\$73.60
351010	Spare, 1 pole	.144	12.00	9.60
352001	Through panel, 1 pole	.246	20.50	16.40
353001	Panel, 1 pole	.438	36.50	29.20

### 3AG MOUNTINGS WITH SCREW TERMINALS—TYPE T

L.F. No.	Description	Net Ea. Lots of 5	Net Per 100	
			100	500
356001	1 pole	\$0.31	\$ 26.00	\$ 20.80
356002	2 pole	.62	52.00	41.60
356003	3 pole	.94	78.50	62.80
356004	4 pole	1.28	132.00	105.60
356005	5 pole	1.97	164.50	131.60
356006	6 pole	2.33	194.00	155.20
356007	7 pole	2.74	228.00	182.40
356008	8 pole	3.11	259.50	207.60
356009	9 pole	3.49	291.00	232.80
356010	10 pole	3.84	320.00	256.00
356011	11 pole	4.22	351.50	281.20
356012	12 pole	4.51	376.00	300.80

### 4AG FUSE MOUNTINGS WITH SCREW TERMINALS—TYPE T

L.F. No.	Description	Net Ea. Lots of 5	Net Per 100	
			100	500
456001	1 pole	\$0.40	\$ 33.00	\$ 26.40
456002	2 pole	.79	65.50	52.40
456003	3 pole	1.18	98.50	78.80
456004	4 pole	1.87	155.50	124.40
456005	5 pole	2.33	194.00	155.20
456006	6 pole	2.78	232.00	185.60
456007	7 pole	3.25	270.50	216.40
456008	8 pole	3.70	308.50	246.80
456009	9 pole	4.16	347.00	277.60
456010	10 pole	4.63	385.50	308.40
456011	11 pole	5.08	423.50	338.80
456012	12 pole	5.53	461.00	368.80

### 5AG MOUNTINGS WITH SCREW TERMINALS—TYPE T

L.F. No.	Description	Net Ea. Lots of 5	Net Per 100	
			100	500
556001	1 pole	\$0.45	\$ 37.50	\$ 30.00
556002	2 pole	.92	76.50	61.20
556003	3 pole	1.37	114.00	91.20
556004	4 pole	2.52	210.00	168.00
556005	5 pole	3.15	262.50	210.00
556006	6 pole	3.77	314.50	251.60
556007	7 pole	4.40	367.00	293.60
556008	8 pole	5.02	418.50	334.80
556009	9 pole	5.65	471.00	376.80
556010	10 pole	6.28	523.00	418.40
556011	11 pole	6.91	575.50	460.40
556012	12 pole	7.51	625.50	500.40

### HIGH VOLTAGE FUSE HOLDERS For 701000 Series Fuses.

L.F. No.	Size, In. L. x H.	Net Each	Net Per 100	
			100	500
711001	2 1/2 x 1 3/4	\$1.52	\$126.50	\$101.20

For 702000 Series Fuses.  
711002 6 1/2 x 1 3/4 \$1.76 \$146.50 \$117.20

For 703000 Series Fuses.  
711003 12 x 3 \$4.05 \$337.50 \$270.00

For 621000 Series Fuses.  
631001 4 x 1 1/4 \$0.88 \$73.50 \$58.80

For 622000 Series Fuses.  
631002 5 1/4 x 1 1/4 \$1.26 \$105.00 \$84.00

For 623000 Series Fuses.  
631003 6 1/4 x 1 1/4 \$1.30 \$108.50 \$86.80

### TV SNAP-ON FUSE HOLDERS

094025	10holders*	\$2.06	\$172.00	\$147.60
350130	Holder†	.....	10.60	7.20

\*In plastic box. †Bulk.

### MANUAL RESET CIRCUIT BREAKERS


Exact replacement protector for TV circuits. Ideal for current overload protection for model railroads, toy transformers, hair dryers, small appliances, tools, wiring, etc. For 125 VAC operation. Size, 1 3/4" x 1 1/4" x 1/2".

L.F. No.*	Trip Amps	Rating Skin Pack	Bulk Pkg.	
			Net Ea.*	Box of 5
8151.75	1.75		\$0.84	\$3.90
815002	2		.84	3.90
8152.25	2.25		.84	3.90
81502.5	2.5		.84	3.90
8152.75	2.75		.84	3.90
815003	3		.84	3.90
8153.25	3.25		.84	3.90
815004	3.75		.84	3.90
81504.5	4.5		.84	3.90

\*Add C when ordering (i.e., 815002C).

L.F. No. 094084 Bulk Assortment—One each of above circuit breakers plus one extra 2.75-amp rating. Net Ea.... \$7.80

L.F. No. 094085 Card Assortment—Same, but card packaging. Net Each.... \$8.40

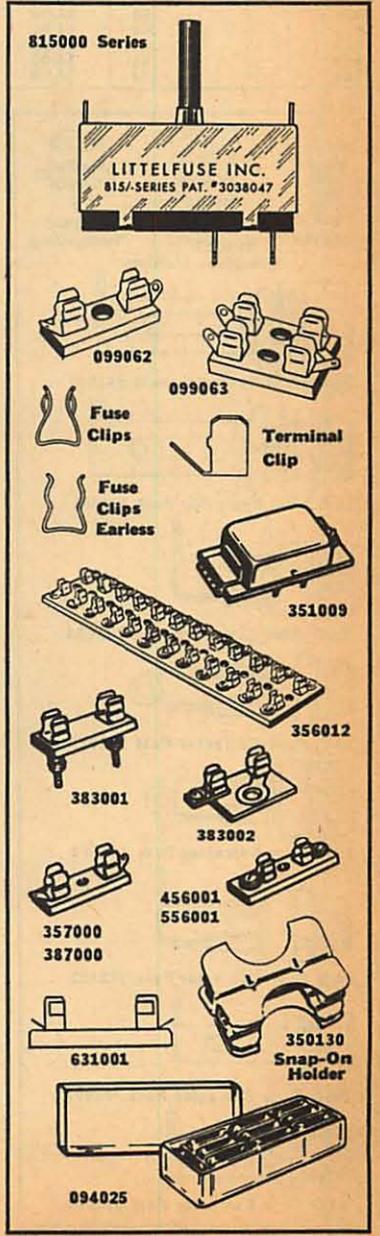

# LITTELFUSE Fuses and Holders

## FUSES AND ASSORTMENTS

### ECON TIME-DELAY PLUG FUSES

Dual-element plug type fuses provide additional protection against blowing during motor starting cycle. U/L Approved. For 125-volt operation.

L.F. No.	Amp Rating	Net Per Box of 4	Net Per 100
TE3/10	3/10	\$0.64	\$14.00
TE4/10	4/10	.64	14.00
TE8/10	8/10	.64	14.00
TE1	1	.64	14.00
TE1-1/8	1-1/8	.64	14.00
TE1-1/4	1-1/4	.64	14.00
TE1-4/10	1-4/10	.64	14.00
TE1-6/10	1-6/10	.64	14.00
TE1-8/10	1-8/10	.64	14.00
TE2	2	.64	14.00
TE2-1/4	2-1/4	.64	14.00
TE2-1/2	2-1/2	.64	14.00
TE3-2/10	3-2/10	.64	14.00
TE3-1/2	3-1/2	.64	14.00
TE4	4	.64	14.00
TE4-1/2	4-1/2	.64	14.00
TE5	5	.64	14.00
TE5-6/10	5-6/10	.64	14.00
TE6-1/4	6-1/4	.64	14.00
TE7	7	.64	14.00
TE8	8	.64	14.00
TE9	9	.64	14.00
TE10	10	.64	14.00
TE12	12	.64	14.00
TE14	14	.64	14.00

### CLEARSITE ONE-TIME PLUG HOUSE FUSES

Full visibility design for positive, clear indication of fuse condition. For 125 v. AC or DC. U/L Approved. Use with standard Edison base fuse holders.

L.F. No.	Amp Rating	Net Per Box of 5	Net Per 100
CP10	10	\$0.35	\$6.40
CP15	15	.32	5.70
CP20	20	.32	5.70
CP25	25	.32	5.70
CP30	30	.32	5.70

### UNIVERSAL AUTO FUSE ASSORTMENT

Emergency fuse kit with ten popular replacement fuses for any car. Littelfuse No. 094080—Net Each... **75c**

### FUSE CADDY

Standard fuse caddy for servicemen to carry in tube caddy. Fifteen compartments for 75 fuses; three spare compartments. See-thru plastic top for easy identification.

Littelfuse No. 094037—Net Each... **\$7.39**

### LIMITED-CURRENT FUSE CADDY

Handy, all-inclusive limited-current fuse caddy complete with 75 fuses of 15 different types. Three extra (spare) compartments.

Littelfuse No. 094041—Net Each... **\$10.00**

### FUSEMASTER DISPLAY

Fuse wall rack with 60 individual compartments for easy, instant self-service. Holds index card on back of rack. Ideal for servicemen, laboratories, etc.

Littelfuse No. 094047—Complete with 100 assorted fuses. Net Each... **\$12.42**  
Littelfuse No. 094048—Empty rack. Net Each... **85c**

### FUSE HOLDERS, RETAINERS MICROFUSE HOLDERS

For mounting of 273000 Series Microfuse. Type 281002 is front panel mounting; 281001 ideal for printed circuit board mtg.; 284000 Series front panel mtg. with indicator bulb.

L.F. No.	Voltage Range	Net Each	Net Per 100	
			100	500
281001	2-1/2-7	\$0.26	\$ 21.50	\$ 17.20
281002	2-1/2-7	.58	49.00	39.00
284004	7-16	2.21	184.00	147.00
284005	7-16	2.21	184.00	147.00
284006	16-32	2.21	184.00	147.00
284003	100-125	1.35	113.00	90.00

### 3AG FUSE EXTRACTOR POSTS

L.F. No.	Type	Net Ea., Lots of 5	Net Per 100	
			100	500
341001	Screw	\$0.46	\$38.00	\$30.40
342001	Finger	.46	38.00	30.40
342004	Miniature	.40	33.00	26.40
342005	Miniature*	.46	38.00	30.40
342006	Watertight	2.69	224.00	179.00
342007	Non-watertight	2.08	173.00	138.00

342012	Miniature	.35	29.00	23.20
342013	Miniature*	.42	35.00	28.00
342014	Miniature	.35	29.00	23.20
342015	Miniature*	.42	35.00	28.00
342020	Miniature	.64	53.50	44.80
342021	Waterproof (FHN 26W Cap)	3.42	285.00	228.00
342022	Miniature	.40	33.00	26.40
342023	Miniature*	.46	38.00	30.40
342024	Miniature (FHN 26G)	1.24	103.50	82.80
342025	FHN20G	1.17	97.50	78.00

\*Dust-proof.

### 8AG FUSE EXTRACTOR POSTS

L.F. No.	Type	Net Ea., Lots of 5	Net Per 100	
			100	500
371001	Screw	\$0.46	\$38.00	\$30.40
372001	Finger	.46	38.00	30.40
372003	FHN31G	2.27	189.50	151.60

### 4AG FUSE EXTRACTOR POSTS

L.F. No.	Type	Net Ea., Lots of 5	Net Per 100	
			100	500
442001	Finger	\$0.96	\$80.00	\$64.00
442006	Watertight	2.69	224.00	179.00
442007	Non-watertight	2.08	173.00	138.00

### 5AG FUSE EXTRACTOR POSTS


L.F. No.	Type	Net Ea., Lots of 5	Net Per 100	
			100	500
570001	Non-watertight	\$2.63	\$219.50	\$175.60
571004	Watertight	3.19	266.00	212.80




Econ Plug Fuse




Clearsite Fuse

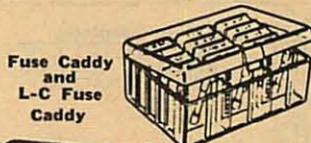


Fuse Caddy and L-C Fuse Caddy

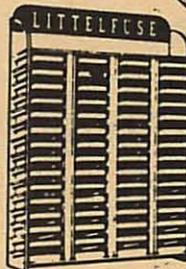


Fusemaster Display



4AG Fuse Extractor Post 442001

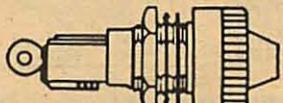

Indicating Fuse Post 344000

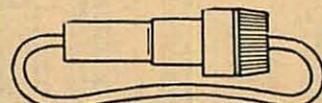

Bakelite In-Line Fuse Retainer Assembled with Lead

### 3AG INDICATING FUSE POSTS

L.F. No.	Voltage	Net Ea., Lots of 5	Net Per 100	
			100	500
344006	2 1/2-7 V	\$2.35	\$195.50	\$156.40
344012	7-16 V	2.35	195.50	156.40
344024	16-32 V	2.35	195.50	156.40
344125	100-125 V	1.43	119.50	95.60
344250	200-250 V	1.43	119.50	95.60

### SERIES 34600 LIMITED CURRENT FUSE HOLDERS

For use with regular and Slo-Blo Type C and N limited current fuses. Specify amperage when ordering. **\$1.50** Net Per 100... **\$46.00** Net Per 500...

### UNIVERSAL FUSE RETAINER

Comes with three different length springs for fuse sizes 7 1/2 SFE thru 3AG. **35c** L.F. No. 150145—Net Each... **\$22.60** Net 100... **\$29.00** Lots 500, Net 100

### BAKELITE® IN-LINE FUSE RETAINERS ASSEMBLED WITH 19" LEAD

L.F. No.	Use with Fuses	Net Ea., Lots of 5	Net Per 100	
			100	500
155004A	SFE 4, 1AG	\$0.35	\$29.00	\$23.20
155006A	SFE 6	.35	29.00	23.20
155075A	SFE 7 1/2	.35	29.00	23.20
155009A	SFE 9, 7AG	.35	29.00	23.20
155014A	SFE 14	.35	29.00	23.20
155020A	SFE 20, 3AG	.35	29.00	23.20
150069-SA-2*		.22	18.50	14.80

©Bakelite Corp. \*Knob sub-assembly.



281001




281002




284000 Indicating


Microfuse Holders




3AG Fuse Extractor Post 341001




3AG Fuse Extractor Post 342001



3AG Fuse Extractor Post 342004



3AG Fuse Extractor Post 342012



3AG Fuse Extractor Post 342014



3AG Fuse Extractor Post 342015



8AG Fuse Extractor Post 371001



8AG Fuse Extractor Post 372001