



Installation Guide

For Studer "B" Cables

TIMELINE VISTA, INC.
1755 LA COSTA MEADOWS DRIVE, SUITE B
SAN MARCOS, CA 92069
TEL. 760-761-4440
(FAX 760-761-4449)
SUPPORT@DIGAUDIO.COM

DATE: 02/05/93
MODEL: Lynx Time Code Module
Lynx-2 Time Code Module
REVISION: All
SERIAL NO: All
SOFTWARE: All

REQUIRED PARTS:

Lynx Time Code Module
Studer "B" Cable, with "serial card interface", TimeLine P/N 71C033

Lynx-2 Time Code Module
Studer "B" Cable, TimeLine P/N 71C034

Studer Machine
Serial Interface, Studer P/N 1.810.752.00
(Not required for A-807, which has serial interface built-in)

DESCRIPTION:

TimeLine Studer Serial Interface will allow:

- Serial machine control
- Individual track select from KCU
- Improved locates and searches

PROCEDURE:

On all but the A-807, the studer serial interface is an optional part from Studer. It is built-in on the A-807. Studer Serial Interface, part number 1.810.752.00, is required for all other machines.

Software requirements for individual Studer machines are:

A-807 = 10/89 or later (Serial control only available on machines with serial numbers higher than 08807)

A-810 = 6/89 or later

A-812 = 4/90 or later

A-820 (2 track) = 6/89 or later

A-820 (multi) = 2/90 or later

A-827 = 5/91 or later

PROCEDURE Continued

Studer serial port mode/settings for A-820 and A-827:

- 9600 baud
- No parity
- One stop bit
- No echo

Other Studer settings:

A-820/A-827: Auto input should be switched off on TC track to improve search and park accuracy, as well as lock-up time.

A-820 (2 track): Switch DELAY OFF for fastest lock-up time.

Warning

Rehearse functions on A-820/A-827:

1. Check menu 44. Must be set to DELAY ON, otherwise machine will go into **RECORD** when rehearse is issued.
 2. If the delay inhibit switch on the Studer machine remote unit is on, the machine will go into **RECORD** when rehearse is issued.
-

Cables

Older TimeLine Lynx cables may not have the rehearse line connected.

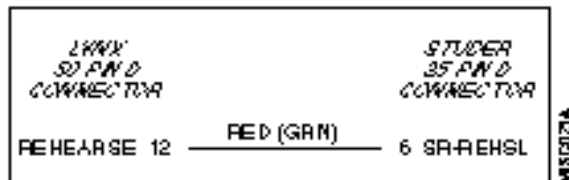


Figure 1. Rehearse Pin Connector