

- OPTIONAL
- RECOMMENDED
- MANDATORY

NEVE/CCU Installation

DATE: 07/25/94
MODEL: Console Control Unit
REVISION: All
SERIAL NO: All
SOFTWARE: CCU 230 and later
SSU 140 and later

DESCRIPTION:

An update is required in the Neve Flying Faders configuration file. This update improves CCU performance in Neve/SSU installations.

PROCEDURE:

Part 1: Flying Faders Computer

Note: We recommend that these changes be made by someone who is familiar with DOS computer systems.

1. Exit from the Flying Faders program on the Flying Faders Computer, to the DOS prompt.
2. With a text editor, add the following lines to the end of the Neve Configuration File:
C:\mfsys\mfad.ini.

```
## TimeLine CCU/SSU System Configuration
## Note: This section must be removed if the SSU is disconnected.
## Enable Transport control
set tapeismast true
## Disable External Transport Control Buttons
tape rewind off
tape forward off
tape play off
tape stop off
```

Part 2: CCU

1. Turn off the CCU and remove the jumper between pins 1 and 2 of CCU Header J5.
2. Power up the CCU while holding the CLR Key to reset the CCU.
3. Under [SETUP] + [SYS] on the CCU, check that control Via is set to DIRECT.

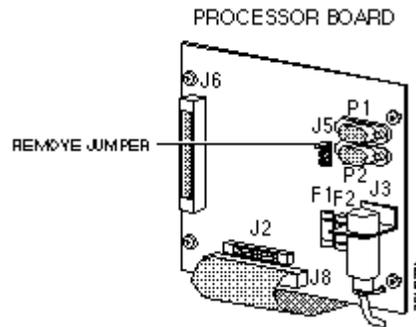


Figure 1. Jumper Location