




BAUER COMMUNICATIONS, INC.

PRECISION TRANSFORMERS
By Reichenbach Engineering


MIC input
150:15K
-2.5dBu

RE-115K-E

MICROPHONE INPUT TRANSFORMER

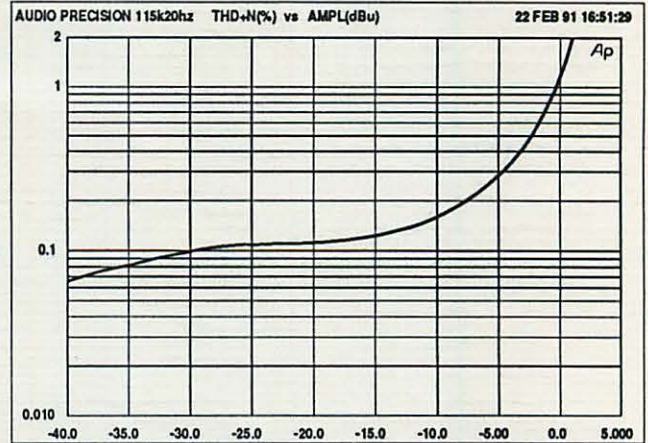




RE-115K-E 20Hz DISTORTION

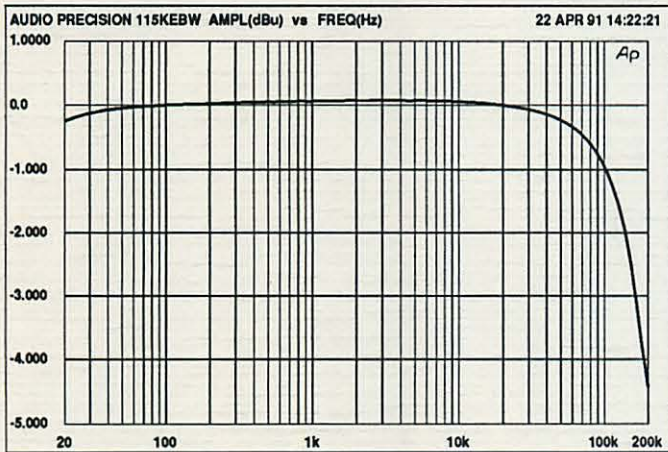

RE-115K-E MAGNITUDE RESPONSE

- **Impedance Ratio:** 150 ohms to 15K ohms
- **Turns Ratio:** 1:10
- **20Hz Max Input Level:** -2.5 dBu
- **Bandwidth (-3db point):** 90 kHz
- **Magnetic Shield:** 30db case with separate lead (white)
- **Faraday Shield:** 1 with separate lead (Black)
- **Recommended Load:** 150K ohms
- **Recommended RC network:** none

NOTE: All transformers formerly sold under the *Jensen Transformers* name are the design and manufacture of Reichenbach Engineering.
Specifications subject to change without notice or obligation.

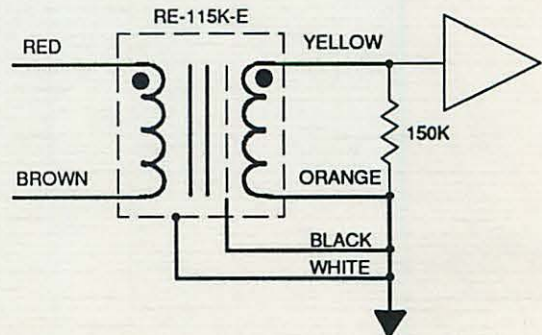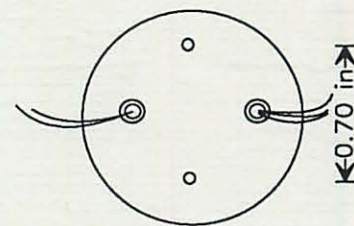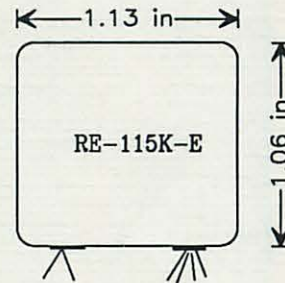

©1991 BCI