




BAUER COMMUNICATIONS, INC.

PRECISION TRANSFORMERS
By Reichenbach Engineering


output split
600/150 : 600/150
+23

RE-123-ELPC

PC MOUNT OUTPUT TRANSFORMER

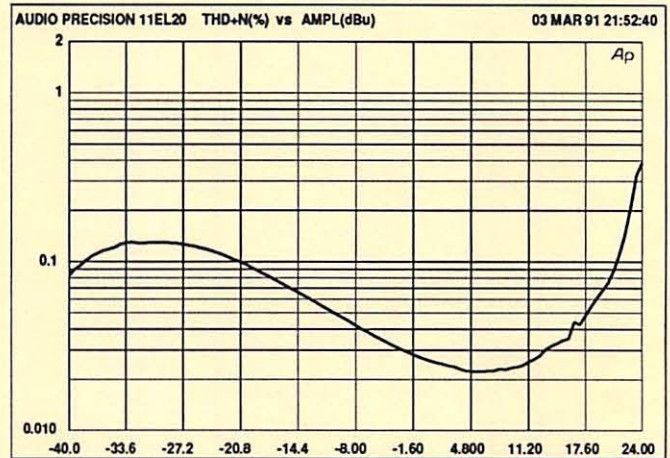

RE-123-ELPC 20Hz DISTORTION

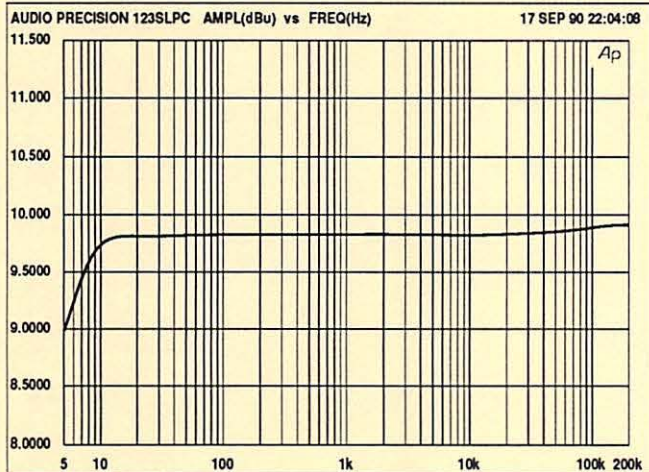

RE-123-ELPC MAGNITUDE RESPONSE

- **Impedance Ratio:** 600/150 ohms to 600/150 ohms
- **Turns Ratio:** 1:1
- **20Hz Max output Level:** +23 dBu
- **30Hz Max output Level:** +27 dBu
- **Bandwidth (-3db point):** > 200 kHz
- **Magnitude Response (20Hz to 20Khz):** 0.2 db
- **Recommended Source:** 0 ohms
- **DCR:** 20 ohms per winding
- **Recommended RC network:** none

NOTE: All transformers formerly sold under the *Jensen Transformers* name are the design and manufacture of Reichenbach Engineering.
Specifications subject to change without notice or obligation.

